


Global MEPS Guide for Low Voltage Motors




Understanding MEPS

The increasing demand for electrical energy to sustain global development requires consistent heavy investments in power supply generation. However, in addition to complex medium and long term planning, these investments rely on natural resources, which are becoming depleted due to constant pressures upon the environment. The best strategy, therefore, to maintain energy supply in the short term is to avoid wastage and increase energy efficiency. Electric motors play a major role in this strategy; since around 40% of global energy demand is estimated to be related to electric motor applications.

As a consequence of this need to reduce energy consumption and carbon dioxide emissions, many Governments worldwide have established local Regulations, also known as **MEPS** (**Minimum Energy Performance Standards**) to numerous types of equipment, including electric motors.

Whilst the specific requirements of these MEPS differ slightly between Countries, the implementation of IEC standards 60034-2-1:2014 (methods for determining losses and efficiencies) and 60034-30-1:2014 (definition of efficiency classes), means that the definition, measurement and publication of the efficiency data is consistent amongst motor manufacturers and therefore easier for the correct motors to be selected.

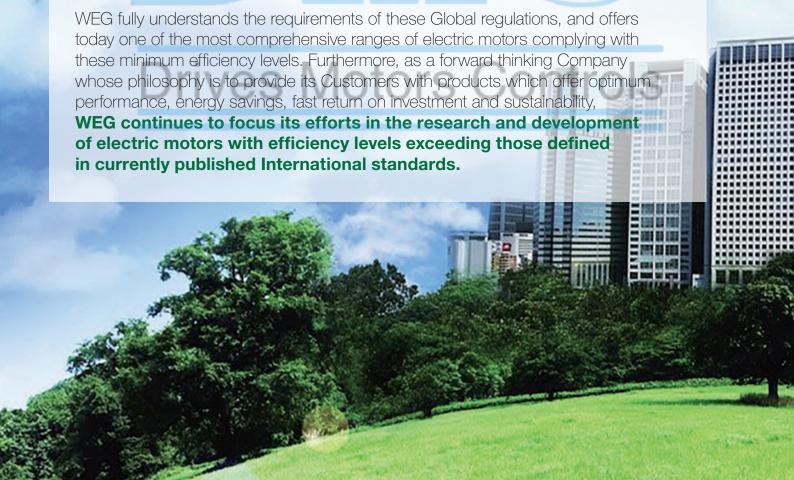

Efficiency Grades















Mandatory Efficiency Regulations Worldwide Overwiew



Legend



Australia, New Zealand & Fiji

GEMS Act of 2012 AS/NZS 1359.5: 2004



Applicable to:

- Ratings from 0.73 to 185kW
- Motors with 2, 4, 6 and 8 poles
- Frequency: 50Hz
- Voltage up to 1100V

Not applicable to:

- 2 speed motors
- Dedicated VFD design (not suitable for DOL)
- Intermittent / short duty cycles
- Integrated design with driven machine (in exception of TEAO that is included)
- Motors designed to operate wholly immersed in a liquid
- Torque motors
- Motors for re-export

- Efficiency level minimum E2 or E3 as per AS/NZS 1359.5
- Efficiency level shall be detailed on motor nameplate
- Motor design must be registered





Interministerial Decree nº 553/2005 NBR 17094-1:2013

Applicable to:

- Motors with 2, 4 poles up to 250 HP
- Motors with 6 poles up to 200 HP
- Motors with 8 poles up to 150 HP
- Frequency: 60 Hz (or 50 Hz operating at 60 Hz)
- Voltage up to 1000 V
- Closed and opened enclosures
- Duty cycle S1 or S3 (ED higher or equal to 80%)
- Starting torque as per design N, H, NY or HY (or NEMA equivalent)

Not applicable to:

- Dedicated VFD design (not suitable for DOL)
- Explosion proof (Ex d / Ex de)
- Increased safety (Exe)
- Water cooled motors
- Motors designed to operate wholly immersed in a liquid

Note: Planned shifts for three-phase motors: IR2 to IR3 for 0,16 up to 500 HP in September, 2019.

Requirements

Motors without this marking will not be allowed through Brazilian customs.

RENDIMENTO E FATOR DE POTÊNC APROVADOS PELO INMETRO (C) Procel

NBR - 17094-1



Chile

NCh 3086 of 2008 IEC60034-30-1

Applicable to:

- Ratings from 0.75 to 7,5 kW
- Motors with 2, 4 and 6 poles
- Frequency: 50 Hz
- Voltage up to 690 V

Not applicable to:

- Brake Motors
- Dedicated VFD design (not for DOL)

Note: Planned shifts for three-phase motors: IE1 to IE2 in February, 2018.



Requirements

Motors held in stock by distributors must be certified for the Energy label according PE no 7/01/2.



China

GB 18613-2012

Applicable to:

- Ratings from 0.75 to 375 kW
- Motors with 2, 4 and 6 poles
- Frequency: 50 or 50/60 Hz (operation in 50Hz)
- Aluminum or cast iron frames
- Voltage up to 1000 V
- Operation up to 1000 m
- Safe and Hazardous Area
- Torque design N
- TEFC motors
- Ambient temperature: -20 °C up to 40 °C
- Increased safety motors (Exe)

Not applicable to:

- Motors completely integrated into a product
- Smoke extraction motors and motors for textile industry
- Conical rotor motors for electric hoist and construction machinery
- Motors with electro-magnetic braking inside
- Motors with a duty type other than S1 or S3 with a rated cyclic duration factor of 80% or higher
- Wound-rotor induction motors
- Two/Multiple winding motors

Requirements

Motors without this label will not be allowed through Chinese customs.

A PART OF THE PART

Nameplate shall record:

- Name of manufacturer
- The criteria: GB 18613-2012
- Efficiency values for 100% load



Grade 3*

*The recommended efficiency level for motors from 7.5 to 375 kW is Grade 2.

Colombia

Resolución nº 4 1012:2015

Applicable to:

Single Phase motors:

- Ratings from 0.18 to 1,5 kW
- Motors with 2, 4 and 6 poles
- Frequency: 60 Hz
- Voltage up to 240 V
- Enclosure ODP and TEFC

Three Phase motors:

- Ratings from 0.18 to 373 kW
- Motors with 2, 4, 6 and 8 poles
- Frequency: 60 Hz
- Voltage up to 600 V
- Enclosure ODP and TEFC



Motors without this label will not be allowed through Colombian customs



1ph > 45% 3ph IE1

Note: Planned shifts for three-phase motors: IE2 in September 2018, IE3 for 7,5-373 kW in September 2020 and IE3 for 0,75-373 kW in September 2021.

Europe & Switzerland



EC 640/2009 & EU 4/2014 IEC 60034-30-1



SR 730.01 IEC 60034-30-1

Applicable to:

- Ratings from 0.75 to 375 kW
- Motors with 2, 4 and 6 poles
- Frequency: 50 and 50/60 Hz
- Voltage up to 1000 V
- Closed and open enclosures

Not applicable to:

- 2 speed motors
- Intermittent duty
- Motors wholly immersed in a liquid
- Motors completely integrated into a product
- Altitude higher than 4000 masl
- Ambient temperature below -30 °C or above 60 °C
- Motors specified to operate exclusively above 400 °C
- Motors for explosive atmospheres
- Brake motors

Requirements

Nameplate shall detail:

- IE code (IE3)
- Efficiency values for 50, 75 and 100% load (not mandatory for small motors)
- CE mark
- IE2 motors for 0,75 up to 375 kW fed by VFD are permitted but must be labelled for exclusive VFD operation





JIS C 4213:2014

Applicable to:

- Ratings from 0.75 to 375 kW
- Motors with 2, 4 and 6 poles
- 200/400 V (50 or 60 Hz)
- 220/440 V (60 Hz)

Not applicable to:

- Explosion proof motors;
- Delta-star starting;
- Marine motors;
- Motors wholly immersed in a liquid;
- High-slip motors;
- Ambient temperature below -20 °C
- Dedicated VFD design (not suitable for DOL) and with Forced ventilation.

Requirements

Importer must provide a self declaration for Efficiency level





SASO IEC 60034-30:2013

Applicable to:

- Ratings from 0.75 to 375 kW
- Motors with 2, 4 and 6 poles
- Frequency: 60 Hz
- Voltage up to 1000 V
- Duty cycle S1 or S3 (ED higher or equal to 80%)

Not applicable to:

- Motors solely for converter operation per IEC 60034-25
- 2-speed motors
- Motors completely integrated into a product which cannot be independently tested
- Brake motors, Gear Motors & Wound Rotor Motors;
- Motors specifically designed to operate:
 - In maximum operating temperatures above 400 °C
 - In potentially explosive atmospheres (e.g. explosion-proof)
 - Wholly immersed in a liquid
 - Torque motors (corresponding to IEC design H, e.g. gate motors & crane motors)
 - With cooling from external equipment (e.g. air over motors, or liquid cooling)
 - In an enclosed container and part of an integrated system (e.g. canned motor)

Requirements

Nameplate shall detail:

- IE code IE3;
- Efficiency values at 100% load
- Motors without a SASO
 Certification of Conformity
 (CoC) will not be allowed through KSA customs



North America







EISA 2014 EEA NEMA MG-1 C390-10 DOE 10 CFR Part 431

NOM-016-ENER-2010

s Motors Controls

Applicable to:

- Ratings from 1 to 500 HP (2, 4, 6 and 8 poles)
- Voltages up to 600 V
- Three-phase
- Frequency: 60 Hz
- Frames 143 and above (or IEC equivalent)
- Hazardous Location
- NEMA Design A, B or C or IEC Design N or H

Applicable only in US:

- 56 frames (enclosed)
- Pump motors
- Footless motors
- Motors with non-standard base or mounting feet
- Vertical motors
- Motors with special shafts and flanges (including JM/JP)
- Brake motors
- Gear motors (if the motor can be removed from the gear)
- Partial motors (except stator-rotor sets)

Note: Fire pump motors from 1 to 500HP, 2 to 8 poles must meet Hig

Not applicable to:

- Dedicated VFD design (not suitable for DOL)
- Submersible motors (IP68)
- Multispeed motors
- Design D
- TEAO or ODPAO
- Intermittent duty motors (S2-S8)
- Stator-rotor sets
- Water cooled motors
- Two digit frames (42 and 48)
- 56 frame ODP



DOE 10 CFR Part 431 **Small Electric Motors**

Applicable to:

- Ratings from 1/4 to 3 HP
- Motors with 2, 4 and 6 poles
- Three or Single Phase (only for CSCR and CSIR)
- NEMA 2-digit frame or IEC equivalent

Not applicable to:

- Definite purpose motors as defined by NEMA MG-1 Part 18
- Non-standard mounting
- Multi-speed motors
- Enclosed motors (Enclosed three-phase 56 frame Integral Horsepower motors covered under EISA, as of June 2016)

Requirements

- Efficiency level shall be as per NEMA MG1 NEMA Premium ®
- Efficiency level shall be detailed on motor nameplate
- Motor shall be registered at Department of Energy (DOE)
- DOE registration number shall be printed on nameplate (WEG: CC029A)



Penalties for violations: \$110 per violation per day



Energy Conservation Standard for Small **Electric Motors**



MKE-2015-28 KS C IEC60034

Applicable to:

- Ratings from 0.75 to 200 kW (2, 4,6 and 8 poles)
- Ratings from 200 to 375 kW (2 and 4 poles)
- Frequency: 60 Hz
- Voltage up to 600 V
- Closed and open enclosures
- Inverter-driven motor with continuous operating (fan, blower and pump)

Not applicable to:

- TEAO and TENV designs
- Duty type S2
- Motors wholly immersed in a liquid
- Design C and D
- Multi-speed motors
- Thrust or sleeve bearing

Requirements

Motors without this label will not be allowed through Korean customs.



IE2 (0.75 to 30kW) IE3 (37 to 375kW)

Taiwan

CNS 14400

Applicable to:

- Ratings from 0.75 to 200 kW
- Motors with 2, 4, 6 and 8 poles
- Frequency: 60 Hz
- Voltage up to 690 V

Not applicable to:

- Motors wholly immersed in a liquid
- Motors completely integrated into a product
- Dedicated VFD design (not for DOL)
- Multi-speed motors







SMG-2012/2 IEC 60034-30-1

Applicable to:

- Ratings from 0.75 to 375 kW
- Motors with 2, 4 and 6 poles
- Frequency: 50 or 50/60 Hz
- Voltage up to 1000 V
- Closed and open enclosures

Not applicable to:

- 2 speed motors
- Intermittent duty
- Motors wholly immersed in a liquid
- Motors completely integrated into a product
- Altitude higher than 1000 masl
- Ambient temperature out below -15 °C or above 40 °C
- Motors for explosive atmospheres
- Brake motors
- Motors specified to operate exclusively above 400 °C

Requirements

Nameplate shall detail:

- IE code (IE3)
- Efficiency values for 50, 75 and 100% load (not mandatory for small motors)
- CE mark
- IE2 motors for 0,75 up to 375 kW fed by VFD are permitted but must be labelled for exclusive VFD operation





(1)

IS 12615:2011

Applicable to:

- Frames 71 up to 315L
- Motors with 2, 4 and 6 poles
- Frequency: 50 Hz
- Voltage up to 1000 V
- Duty cycle S1 or S3 (ED higher or equal to 80%)
- Ambient temperature up to 40 °C
- Protection IP44 and above
- Cooling IC411 (TEFC).

Not applicable to:

- Dedicated VFD design (not for DOL)
- Motors completely integrated into a product

Three-phase induction electric motors that are not within the scope of IS 12615: 2011 can continue to be sold and installed in India normally.

Requisitos

- Minimum efficiency level according IS 12615:2011(IE2)
- Motor must be certified by an Indian Certification Body
- Motor must be identified with the Standard ISI Mark



WEG Worldwide Operations

ARGENTINA

San Francisco - Cordoba Phone: +54 3564 421484 info-ar@weg.net

Cordoba - Cordoba Phone: +54 351 4641366 weg-morbe@weg.com.ar

Buenos Aires Phone: +54 11 42998000

ventas@pulverlux.com.ar

AUSTRALIA

Scoresby - Victoria Phone: +61 3 97654600 info-au@weg.net

AUSTRIA

Markt Piesting - Wiener Neustadt-Land Phone: +43 2633 4040 watt@wattdrive.com

BELGIUM

Nivelles - Belgium Phone: +32 67 888420 info-be@weg.net

BRAZIL

Jaraguá do Sul - Santa Catarina Phone: +55 47 32764000 info-br@weg.net

CHILE

Santiago Phone: +56 2 27848900 info-cl@weg.net

CHINA

Nantong - Jiangsu Phone: +86 513 85989333 info-cn@weg.net

Changzhou – Jiangsu Phone: +86 519 88067692 info-cn@weg.net

COLOMBIA

San Cayetano - Bogota Phone: +57 1 4160166 info-co@weg.net

ECUADOR

El Batan - Quito Phone: +593 2 5144339 ceccato@weg.net

FRANCE

Saint-Quentin-Fallavier - Isère Phone: +33 4 74991135 info-fr@weg.net

GERMANY

Türnich - Kerpen Phone: +49 2237 92910 info-de@weg.net

Balingen - Baden-Württemberg Phone: +49 7433 90410 info@weg-antriebe.de

Homberg (Efze) - Hesse Phone: +49 5681 99520 info@akh-antriebstechnik.de

GHANA

Accra
Phone: +233 30 2766490
info@zestghana.com.gh

INDIA

Bangalore - Karnataka Phone: +91 80 41282007 info-in@weg.net

Hosur - Tamil Nadu Phone: +91 4344 301577

info-in@weg.net

ITALY

Cinisello Balsamo - Milano Phone: +39 2 61293535 info-it@weg.net

JAPAN

Yokohama - Kanagawa Phone: +81 45 5503030 info-jp@weg.net

MALAYSIA

Shah Alam - Selangor Phone: +60 3 78591626 info@wattdrive.com.my

MEXICO

Huehuetoca - Mexico Phone: +52 55 53214275 info-mx@weg.net

Tizayuca - Hidalgo Phone: +52 77 97963790

NETHERLANDS

Oldenzaal - Overijssel Phone: +31 541 571080 info-nl@weg.net

PERU

La Victoria - Lima Phone: +51 1 2097600 info-pe@weg.net

PORTUGAL

Maia - Porto Phone: +351 22 9477700 info-pt@weg.net

RUSSIA and CIS

Saint Petersburg Phone: +7 812 363 2172 sales-wes@weg.net

SOUTH AFRICA

Johannesburg Phone: +27 11 7236000 info@zest.co.za

SPAIN

Coslada - Madrid Phone: +34 91 6553008 wegiberia@wegiberia.es

SINGAPORE

Singapore Phone: +65 68589081 info-sg@weg.net

Singapore

Phone: +65 68622220 watteuro@watteuro.com.sg

SCANDINAVIA

Mölnlycke - Sweden Phone: +46 31 888000 info-se@weg.net

UK

Redditch - Worcestershire Phone: +44 1527 513800 info-uk@weg.net

UNITED ARAB EMIRATES

Jebel Ali - Dubai Phone: +971 4 8130800 info-ae@weg.net

USA

Duluth - Georgia Phone: +1 678 2492000 info-us@weg.net

Minneapolis - Minnesota Phone: +1 612 3788000

VENEZUELA

Valencia - Carabobo Phone: +58 241 8210582 info-ve@weg.net

For those countries where there is not a WEG own operation, find our local distributor at www.weg.net.



www.weg.net

WEG Group Jaraguá do Sul - SC - Brazil Phone: +55 47 3276 4000 info-br@weg.net

